



# Titano

## Trave a doppia pendenza

sistema strutturale a doppia pendenza

Trave a doppia falda alloggiata in apposita sede predisposta sulla testa del pilastro.

Si abbina a tegoli binervati, coppelle con nervature estradossate ad intradosso liscio e solai piani.

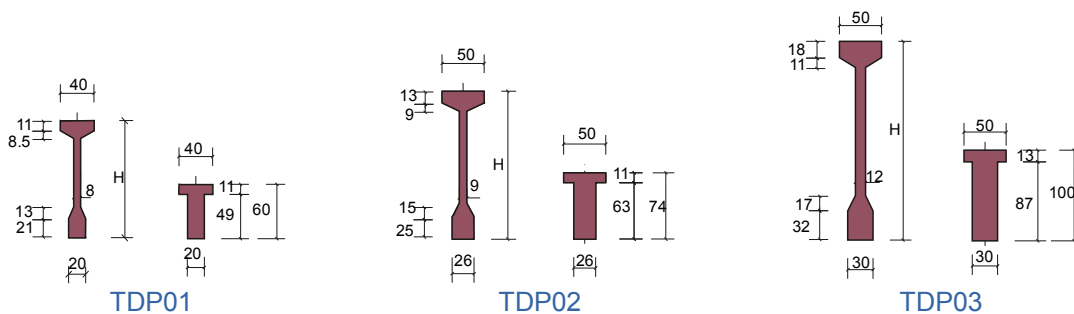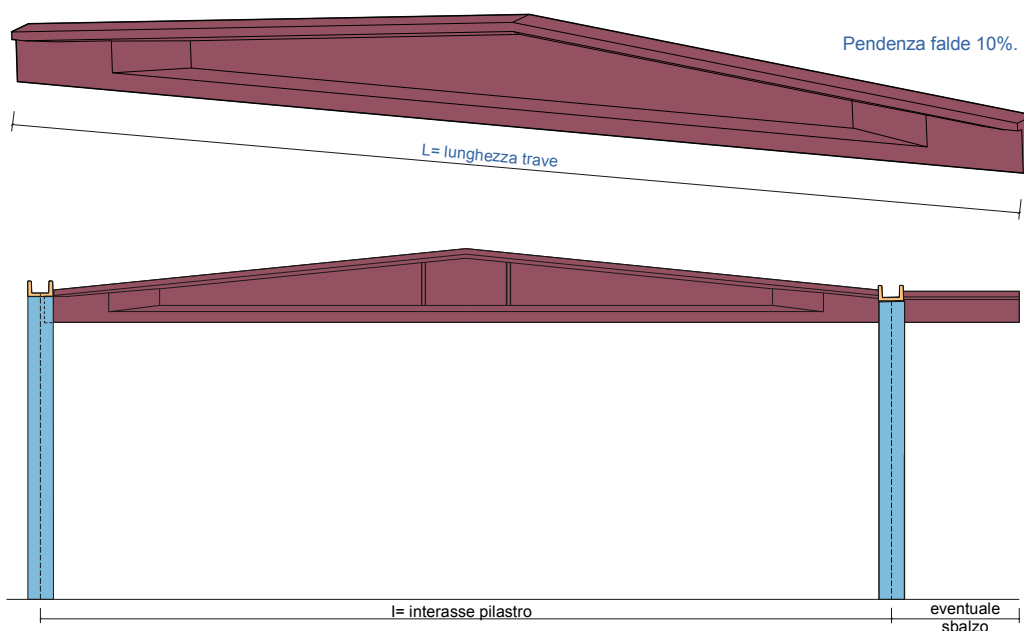

**TDP01** R= 120' (D.M. 16.02.07)

	12	13	14	15	16	17
I	12,00	13,00	14,00	15,00	16,00	17,00
L	11,80	12,80	13,80	14,80	15,80	16,80
H	1,19	1,24	1,29	1,34	1,39	1,44
daN	4400	4880	5300	5680	6200	6650

**TDP02** R= 120' (D.M. 16.02.07)

	18	19	20	21	22	23	24	25
I	18,00	19,00	20,00	21,00	22,00	23,00	24,00	25,00
L	17,80	18,80	19,80	20,80	21,80	22,80	23,80	24,80
H	1,63	1,68	1,73	1,78	1,83	1,88	1,93	1,98
daN	10350	11000	11680	12350	13060	13770	14480	15200

**TDP03** R= 120' (D.M. 16.02.07)

	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42
I	26,00	27,00	28,00	29,00	30,00	31,00	32,00	33,00	34,00	35,00	36,00	37,00	38,00	39,00	40,00	41,00	42,00
L	25,80	26,80	27,80	28,80	29,80	30,80	31,80	32,80	33,80	34,80	35,80	36,80	37,80	38,80	39,80	40,80	41,80
H	2,29	2,34	2,39	2,44	2,49	2,54	2,59	2,64	2,69	2,74	2,79	2,84	2,89	2,94	2,99	3,04	3,09
daN	20550	21450	22350	23300	24200	25100	26100	27000	28000	28970	30050	31150	32150	33150	34200	35200	36200